




ABOVE AND BEYOND **HONING**

SHDD SERIES

BTA DEEP-HOLE DRILLING SYSTEMS

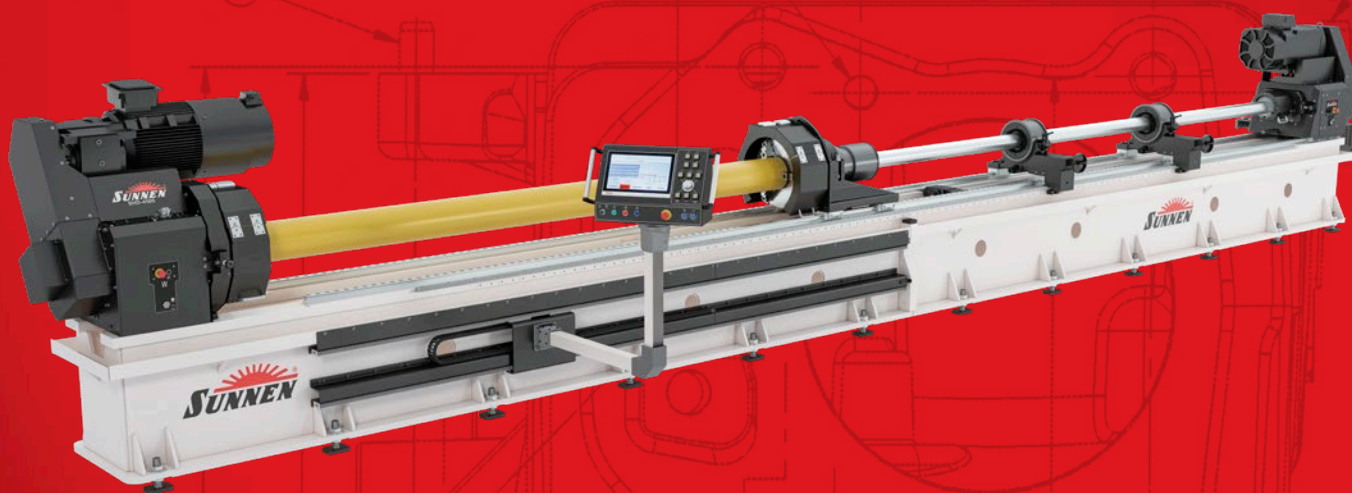

SUNNEN'S SHDD SERIES BTA DEEP-HOLE DRILLING



Sunnen Products Company, the global leader in bore sizing and finishing technology since 1924, now offers a cost-effective BTA drilling solution... the Sunnen SHDD Series Deep-Hole Drilling Systems. The SHDD systems were designed with input from the deep-hole drilling industry. Every feature was scrutinized to improve the productivity and reliability of the machine. This design and testing effort coupled with the use of heavy-duty name brand components ensures years of trouble free operation.

SHDD Series systems can achieve tight diameter control, straightness, and superior surface finish

in a variety of workpieces and materials from aluminum to super-alloys. Three standard machine models are available (**2-meter, 4-meter and 6-meter** part length capable) along with BTA-style drills, drill tubes, cutters, coolant systems and coolants.

The heavy-duty SHDD series includes the latest system controls, allowing users to achieve their manufacturing tolerances and production requirements reliably, accurately, and efficiently. Workpiece change-over and run times are minimized ensuring process profitability. All machines are engineered and built in the USA, and include a 3-year warranty, backed by Sunnen's extensive global service and support network.



SUNNEN[®]

SYSTEMS FOR IMPROVED PRODUCTION RATES



The new Sunnen SHDD-series is designed around the BTA deep-hole drilling process in cylindrical parts. However, it is also capable of a wide variety of other similar machine processes, including counter boring, pull boring, trepanning, bottom forming, and skiving/roller burnishing.

Three different operating modes are available to match the specific workpiece application: tool rotates/part stationary; part rotates/tool stationary; or, tool rotates/part counter rotates. The SHDD-series is a great choice for applications spanning many industries such as oil and gas, ship building, aerospace, hydraulics/pneumatics, die/mold making and military armaments.

Typical applications include:

- Drill collars
- Drill pipes
- Submersible pumps
- Hydraulic fracturing components
- Ship rotor shafts
- Landing gears
- Turbine shafts
- Refueling pipes
- Large hydraulic cylinders
- Wind power turbine shafts
- Cannon barrels

Your Sunnen Technical Specialist will work with you to determine the best solution for your needs – it's all part of the added value you get with Sunnen. Plus, our worldwide sales and service team provides comprehensive support for the installation and operation of every system we make.

Whatever your need, we have the expertise and product range to create the right solution for you and the dedication to support you for the long run.

Buy with confidence



Sunnen backs the quality of its machines with a **"best in the business" 3-year standard machine warranty.**



EASY-TO-USE, EFFICIENT, HEAVY-DUTY




- **Available in three standard models**
 - 2-meter maximum part length (SHD-2500D)
 - 4-meter maximum part length (SHD-4500D)
 - 6-meter maximum part length (SHD-6500D)
- Large 394 mm (15.5 in) color HMI with intuitive controls for ease of use.
- Heavy-duty Bosch-Rexroth 55 mm (2.16 in) linear rails for maximum durability.
- Standard safety system with a combination of multiple E-stops, light curtains, interlocked guarding and fencing.
- 67 kw (90 hp) tool motor with headstock drive for optimum power.
- Beckhoff servo driven heavy-duty ball screws for tool feed and part clamping.
 - 80 mm ball screw (3.15 in) SHD 2500D / 4500D
 - 100 mm ball screw (3.84 in) SHD 6500D
- Electrical enclosure air conditioning unit standard to protect critical electronics in high temperature environments.
- Heavy-duty welded base.
- Heavy duty 3-jaw chucks standard
- Automatic lubrication system for ball screw, rack and pinion, and linear rails standard.
- Heavy-duty servo rack and pinion driven part clamping.
- Spindle carriage control station for ease of driveshaft installation.
- Sunnen is the complete system supplier ... machines, tools, chip management, cooling systems and cutting fluids.
- Standard 38 kw (50 HP) workpiece headstock drive (counter rotation)



SUNNEN DESIGNED AND DEVELOPED INTUITIVE CONTROL SYSTEM

Features include:

- Beckhoff PLC with 394 mm (15.5 in) color touchscreen
- All machine functions controlled from the operator station
- Real time graphical display of tool position, tool feed load, spindle loads, and coolant pressure and volume
- Two-button part-to-part mode for high production operation
- Slow start tool feed for setup
- Tool protection function
- USB port for ease of backup
- Metric/inch units screen selectable
- Up to 500 part setups can be saved and retrieved
- Machine diagnostics
- On-screen, multi-language selection

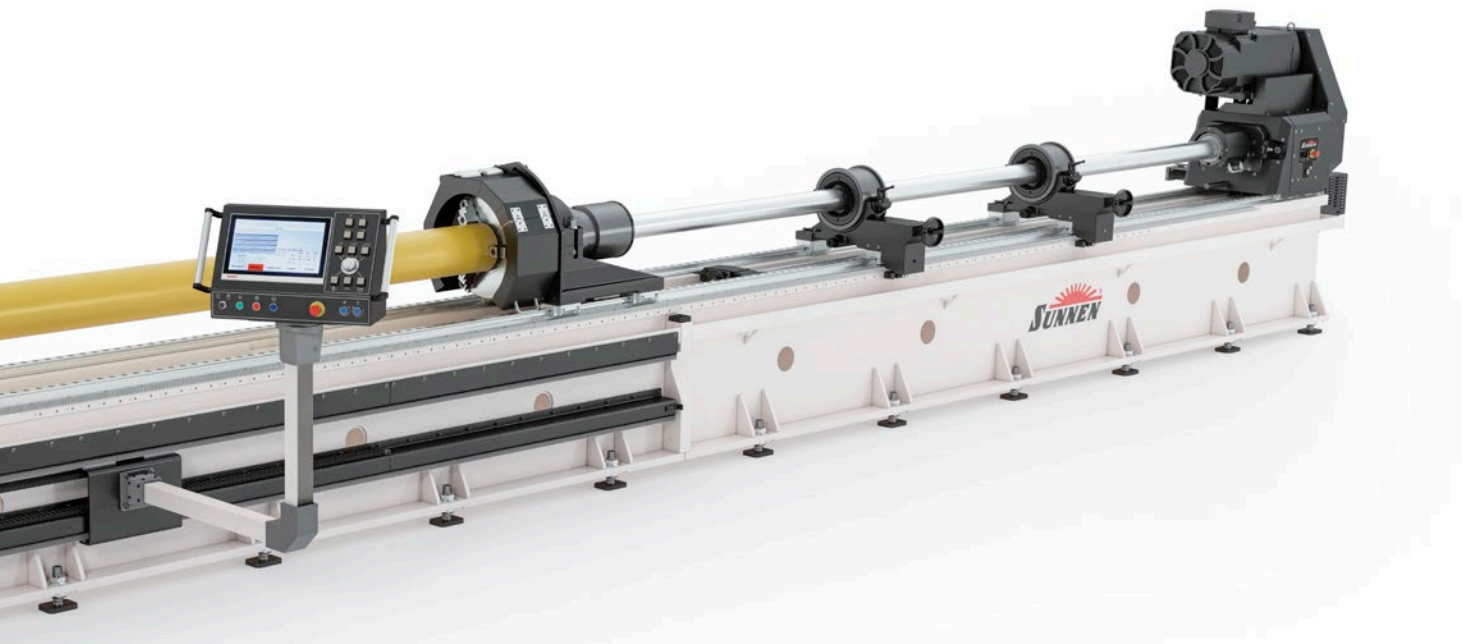

HEAVY-DUTY SUNNEN DESIGNED AND BUILT COOLANT SYSTEM

Features Include:

- Modular clean and dirty tanks with 6245 liter (1650 gallon) maximum capacity and 3765 liter (1000 gallon) operating capacity
- Heavy-duty welded construction using 4.75 mm (.187 in) plate with a double wall option available
- High flow 10-micron, four-bag filtration system
- Heavy-duty screw type pump with 757 lpm (200 gpm) max flow
- 70-micron inlet filter
- Standard chiller for hot environments
- Designed for maintainability with multiple level sensors, clean-out ports and instrumentation
- Heavy-duty chip conveyor
- Active coolant level monitoring

THE SHDD SERIES UP CLOSE



Standard heavy-duty
3-jaw chuck



Automatic chip
removal system



Heavy-duty tool
drive shaft
vibration dampeners

SPECIFICATIONS:

SOLID DRILL BORE DIAMETER RANGE (ID):

19- 127 mm (.8- 5.0 in) - DRILLING
UP TO 7.0 IN COUNTERBORING - TREPPANNING

OUTSIDE DIAMETER RANGE (OD):

508 mm MAX (20 in)

MAXIMUM PART LENGTH:

SHD-2500D (2-METER): 2000 mm (78.7 in)
SHD-4500D (4-METER): 4000 mm (157.5 in)
SHD-6500D (6-METER): 6000 mm (236 in)

TOOL HEADSTOCK SPEED:

1150 RPM maximum

TOOL HEADSTOCK POWER:

67 kW (90 hp)

WORKPIECE HEADSTOCK SPEED:

275 RPM maximum

WORKPIECE HEADSTOCK POWER:

36 kW (50 hp)

MAXIMUM COOLANT FLOW:

750 liters per minute (200 gpm)

MAXIMUM COOLANT PRESSURE

3.1 MPA (450 PSIG)

VOLTAGES AVAILABLE:

Electrical System:
400 VAC 50 Hz 3 phase
460 VAC 60 Hz 3 Phase

SHDD MACHINE OPTIONS

- Pull boring capability 178 mm (7") maximum (large bore pressure head option required)
- Lantern chuck for pull boring
- Front chip exhaust; full conveyor and chip box
- Large bore workpiece pressure head with a maximum capability of 178 mm (7")
- 4-jaw chucks for pressure head and workpiece headstock
- Part roller type steady rests:
25 mm - 356 mm (1' - 14') O.D. Range
- Fully enclosed work area guarding
- Camera at chip exit w/ability to view through operator display
- Remote process monitoring (OPCUA)
- Part bar code scanning capability
- Drive bar bushings, collets, packing glands, and drive adapters
- Rear chuck for work piece headstock
- Additional vibration dampener – one additional unit may be added on each model machine. Note: addition of optional unit reduces part length capacity by 310 mm (12.2")

SUNNEN'S BTA DEEP-HOLE DRILLING TOOLS AND ACCESSORIES

Sunnen is your single source supplier of deep-hole machining tools, cutting oils and accessories designed to work with Sunnen and other machines.



SOLID DRILLING TOOLS

Brazed and indexable tools in a wide range of diameters



TREPANNING TOOLS

Indexable trepanning tools for most applications



COUNTER BORING/REAMING TOOLS

Push, pull and piloted styles available



FORM TOOLS

Designed for your specific blind bore application



DEEP-HOLE MACHINING OIL

Provides optimal lubricity and chip flushing capability




GUIDE PADS

Solid carbide and brazed-style guide pads available



INSERTS

Available in multiple carbide grades, coatings and chip breaker designs

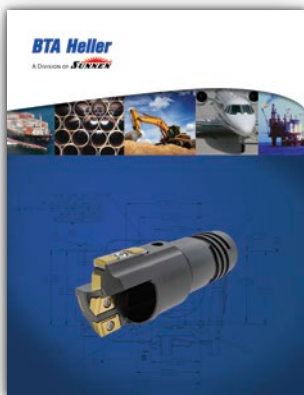

FIND OUT MORE

For additional details on deep-hole machining tools and accessories for the SHDD Series Deep-Hole Drills, please ask for Catalog # BTAH-1000 or visit www.btaheller.com



A LEGACY OF EXCELLENCE SINCE 1924.

SUNNEN WORLDWIDE



With world headquarters in St. Louis, Missouri, Sunnen is the largest fully integrated company in the world specializing in precision bore creation, sizing and finishing equipment. A Sunnen solution might include honing, lapping, skiving/roller burnishing or deep hole machining... or a combination of those processes.

Our 13 international subsidiaries and over 40 authorized distributors allow us to deliver top quality Sunnen machines, tools, service and training wherever they are needed around the globe.

SUNNEN PRODUCTS COMPANY World Headquarters St. Louis, MO – USA

Phone (314) 781-2100
Fax (314) 781-2268
Toll Free (800) 325-3670
Email sunnen@sunnen.com
www.sunnen.com

Austria – Sunnen Austria GmbH

Phone +43 (0) 5576 74194
Fax +43 (0) 5576 74196
Email sales@sunnen.eu
www.sunnen.at

Belgium – Sunnen Benelux BVBA

Phone +32 38 80 2800
Fax +32 38 44 3901
Email info@sunnen.be
www.sunnen.be

Brazil – Sunnen do Brasil LTDA.

Phone +55 11 4368-4900
Email sunnen@sunnen.com.br
www.sunnen.com.br

Canada – Sunnen Products Company

Phone 844-356-0006
Email canadasales@sunnen.com
www.sunnen.com/canada

China – Shanghai Sunnen Mechanical Co. Ltd.

Phone +86 21 5813 3990
Fax +86 21 5813 2299
Email shsunnen@sunnensh.com
www.sunnensh.com

Czech Republic – Sunnen s.r.o.

Phone +420 383 376 317
Fax +420 383 376 316
Email sunnen@sunnen.cz
www.sunnen.cz

France – Sunnen SAS

Phone +33 01 69 30 0000
Fax +33 01 69 30 1111
Email info@sunnen.fr
www.sunnen.fr

India – Sunnen India Pvt. Ltd.

Phone +91 223 913 6055
Fax +91 223 913 6056
Email sales@sunnen.in
www.sunnen.in

Italy – Sunnen Italia S.r.l.

Phone +39 02 383 417 1
Fax +39 02 383 417 50
Email sunnen@sunnenitalia.com
www.sunnenitalia.com

Poland – Sunnen Polska Sp. z o.o.

Phone +48 22 814 34 29
Fax +48 22 814 34 28
Email sunnen@sunnen.pl
www.sunnen.pl

Russia – Sunnen RUS

Phone +7 495 258 43 43
Fax +7 495 258 91 75
Email sunnen@sunnen-russia.ru
www.sunnen.ru

Switzerland – Sunnen AG

Phone +41 71 649 33 33
Email sales@sunnen.eu
www.sunnen.eu

UK – Sunnen Products Ltd.

Phone +44 1442 39 39 39
Fax +44 1442 39 12 12
Email hemel@sunnen.co.uk

Sunnen reserves the right to change or revise specifications and product design in connection with any feature of our products contained herein. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment, supplies or accessories previously sold. Information contained herein is considered to be accurate based on available information at the time of printing. Should any discrepancy of information arise, Sunnen recommends that user verify the discrepancy with Sunnen before proceeding.